DOOR SCHEDULE

NO.	NAME	DOOR WIDTH	DOOR HEIGHT	DOOR TYPE	DOOR MATL.	FRAME TYPE	FRAME MATL.	RATING	HARDWARE	REMARKS
	FIRST FLOOR									
10	EXTERIOR TO VESTIBULE	11'-4"	8'-10"	D5	ALUMINUM	-	ALUMINUM	--	#8	B,C
11	VESTIBULE TO LOBBY	11'-4"	8'-10"	D5	ALUMINUM	-	ALUMINUM	--	#10	B,C,G
12	STAIR #1 TO EXTERIOR	3'-0"	7'-0"	D1	GALV. HM	A	GALV. HM	--	#16	NO EXTERIOR HARDWARE
13	EXTERIOR TO CORRIDOR	3'-0"	7'-0"	D4	ALUMINUM	A	ALUMINUM	--	#12	C, CARD READER
14	EXTERIOR TO WATER	3'-6"	7'-0"	D1	GALV. HM	A	GALV. HM	--	#23	--
15	POOL TO EXTERIOR	3'-0"	8'-0"	D4	ALUMINUM	E/702	ALUMINUM	--	#12	C ; FRAME AND SIDELITE 16'-0" R.O. CARD READER
16	POOL TO EXTERIOR	3'-0"	8'-0"	D4	ALUMINUM	G/702	ALUMINUM	- -	#12	C ; FRAME AND SIDELITE 16'-0" R.O. CARD READER
17	OUTDOOR STORAGE TO EXTERIOR	3'-0"	7'-0"	D1	GALV. HM	A	GALV. HM	--	#11	--
18	STAIR #2 TO EXTERIOR	3'-0"	7'-0"	D1	GALV. HM	A	GALV. HM	--	#16	NO EXTERIOR HARDWARE
19	EXTERIOR TO CORRIDOR	3'-0"	7'-0"	D4	ALUMINUM	A	ALUMINUM	--	#12	C, CARD READER
20	LOBBY TO EXTERIOR	3'-0"	7'-0"	D4	ALUMINUM	D/702	ALUMINUM	--	#12	C ; FRAME AND SIDELITE 21'-0" R.O. CARD READER
101	STAIR #1 TO CORRIDOR	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	90 MIN	#15	5X20 LITE, PANIC DEVICE, SEE REMARKS NOTE D
104B	EMPLOYEE BREAK ROOM TO STORAGE	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#14	--
104C	ICE TO FOOD PREP	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#17	--
106A	BREAKFAST TO FOOD PREP	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#17	--
106B	LAUNDRY TO EMPLOYEE BREAK ROOM	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	45 MIN	#18	--
106C	SERVERY TO FOOD PREP	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#17	--
107A	MEETING ROOM TO STORAGE	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#14	--
107B	CORRIDOR TO MEETING ROOM	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#6	1-WAY VIEWER LOOKING INTO ROOM, SEE REMARKS NOTE D
107C	CORRIDOR TO MEETING ROOM	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#6	1-WAY VIEWER LOOKING INTO ROOM, SEE REMARKS NOTE D
108C	POOL TO POOL EQUIPMENT	PR 3'-0"	6'-8"	D3	FIBER GLASS	A	FIBER GLASS	45 MIN	#13	--
108D	LAUNDRY TO DRYERS	2'-4"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#22	--
109A	HALL TO WOMEN	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#21	--
109B	HALL TO MEN	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#21	--
109C	HALL TO MECHANICAL	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#14	--
109D	HALL TO SALES	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#18	--
112A	REGISTRATION TO WORK STATIONS	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#20	--
112B	WORK STATIONS TO LAUNDRY	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	45 MIN	#20	--
112C	LAUNDRY TO STORAGE	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#14	--
112D	POOL TO POOL VESTIBULE	3'-0"	6'-8"	D4	ALUMINUM	D	ALUMINUM	20 MIN	#9	C ; FRAME AND SIDELITE 8'-3 1/2" R.O.
114A	LAUNDRY DISCHARGE TO LAUNDRY	3'-6"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#19	--
114B	WORK STATIONS TO MANAGER	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#20	--
114C	ELEVATOR LOBBY TO LAUNDRY DISCHARGE	3'-6"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	45 MIN	#19	--
114D	MANAGERS TO CLOSET	2'-6"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#22	--
114E	ELEVATOR LOBBY TO POOL VESTIBULE	3'-0"	6'-8"	D4	ALUMINUM	C	ALUMINUM	--	#9	C ; FRAME AND SIDELITE 7'-0 1/4" R.O., NO CARD READER
114F	LAUNDRY DISCHARGE TO STORAGE	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#14	--
118A	POOL VESTIBULE TO UNISEX	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#21	NO GASKET
118B	CORRIDOR TO ELECTRICAL	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	45 MIN	#17	--
118D	POOL TO STORAGE	3'-0"	6'-8"	D1	FIBER GLASS	A	FIBER GLASS	--	#14	--
118E	ELEVATOR LOBBY TO PBX	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	45 MIN	#17	--
119A	CORRIDOR TO FITNESS	3'-0"	7'-0"	D4	ALUMINUM	B	ALUMINUM	20 MIN	#7	C ; FRAME AND SIDELITE 9'-7 3/4" R.O.
119B	FITNESS TO GUEST LAUNDRY	3'-2"	6'-8"	-	-	A	HOLLOW METAL	--	--	FRAME ONLY
120A	CORRIDOR TO MAINTENANCE STORAGE	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#18	--
120B	MAINTENANCE STORAGE TO WATER	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	45 MIN	#17	--
130	STAIR #2 TO CORRIDOR	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	90 MIN	#15	5X20 LITE, PANIC DEVICE, SEE REMARKS NOTE D
	GUEST ROOMS									
---	GUEST ENTRY	3'-0"	6'-8"	D2	S.C. WOOD	A	HOLLOW METAL	20 MIN	#1	--
---	CONNECTING DOORS	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	45 MIN	#3	A
---	BATH DOOR	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#5	--
---	BEDROOM DOOR	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	--	#4	--
	UPPER FLOORS									
-01	STAIR #1	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	90 MIN	#15	NO LOCKSET, 5X20 LITE, SEE REMARKS NOTE D
-18A	HOUSE KEEPING	3'-6"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	45 MIN.	#24	--
-18C	ICE TO ELECTRICAL	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	20 MIN	#18	--
-30	STAIR #2	3'-0"	6'-8"	D1	S.C. WOOD	A	HOLLOW METAL	90 MIN	#15	NO LOCKSET, 5X20 LITE, SEE REMARKS NOTE D

GENERAL DOOR NOTES:

1. ALL DOOR HARDWARE SHALL BE US 32D FINISH (U.N.O.)
2. ALL DOOR CYLINDERS TO BE IC CORE FORMAT TO MATCH PROPERTY STANDARDS.
3. NOT USED
4. REFER TO SHEET A450 FOR WALL TYPES - CROSS REFERENCE AGAINST DOOR FRAME THROAT THICKNESS
5. ALL DOORS SHALL BE PRE-FINISHED (SHOP OR FACTORY)
6. TOPS, BOTTOMS & SIDES OF ALL DOORS SHALL BE PAINTED OR STAINED TO MATCH DOOR.
7. PROVIDE CONSTRUCTION CYLINDERS DURING CONSTRUCTION. FOR DOORS REQ'D TO BE LOCKED REPLACE CONSTRUCTION CYLINDERS PRIOR TO HOTEL OPENING. COORDINATE W/ GENERAL CONTRACTOR.
8. ALL DOORS TO BE MASTER KEYED. COORDINATE KEYING W/ OWNER.
9. ALL LOCKSETS & CYLINDERS ARE SUPPLIED W/ FINAL CORES. PERMANENT KEYING BY DOOR SUBCONTRACTOR.
10. ALL 'EXIT' DOORS MUST BE OPERABLE FROM THE INSIDE W/OUT THE USE OF A KEY, SPECIAL KNOWLEDGE, OR EFFORT.
11. ALL INTERIOR DOOR GLAZING & SIDELITES SHALL BE CLEAR TEMPERED GLASS (U.N.O.)
12. GLAZING AT EXTERIOR DOORS & SIDELITES SHALL BE INSULATED TEMPERED LITES.- REFER TO ELEVATIONS
13. ALL DOOR HARDWARE SHALL COMPLY W/ ACCESSIBILITY REQ'S FOR ACCESSIBILITY. - FEDERAL, STATE & LOCAL ACCESSIBILITY CODE(S).
14. ALL FULL/HALF VISION DOORS SHALL BE A MEDIUM STILE (U.N.O.)
15. ALL RATED DOORS SHALL BE PROVIDED W/ MIN. REQ.'D DOOR HARDWARE REGARDLESS IF NOT SHOWN ON SCHEDULE. IF DIRECTION INDICATED OR NOTED IS SPECIFICALLY IN CONTRADICTION TO WHAT IS REQ'D. IN RATED DOORS, CONTACT ARCHITECT.
16. WHERE UNDERCUT NOT SPECIFIED, STANDARD UNDERCUT OF 3/4" FOR HM & WOOD DOORS.
17. 1 1/2" PAIR BUTT HINGES PER DOOR LEAF UP TO 7'-0". SOLID CORE WOOD OR HM DOORS FROM 7'-0" TO 10'-0" PROVIDE 2 PAIR BUTT HINGES PER DOOR LEAF. DOORS 10'-1" TO 14'-0" IN HEIGHT, PROVIDE 2 1/2 PAIR HINGES PER DOOR LEAF.
18. PROVIDE (3) SILENCERS IN SINGLE LEAF DOORS, (2) SILENCERS IN DOUBLE LEAF DOORS UNLESS PAIR OF DOORS HAS MIDDLE MULLION THEN PROVIDE A TOTAL (6) SILENCERS
19. LOCKSET SHALL OPERATE WHERE TURNING KEY UNLATCHES DOOR WHEN PUSHBUTTON IS ENGAGED & TURNED, KEY OPERATION WILL BE REQ'D @ ALL TIMES. RELEASING PUSHBUTTON UNLOCKS DOOR.
20. REFER TO INTERIOR ELEVATIONS FOR DOOR FINISHES. DOORS SPECIFIED W/ A MILLWORK FINISH SHALL BE FINISHED BY MILLWORK CONTRACTOR TO MATCH MILLWORK IN THAT ROOM/AREA
21. PROVIDE REMOTE CARD READERS @ ALL EXTERIOR DOORS, INCLUDING MAIN ENTRY, & @ EXERCISE ROOM, INDOOR POOL & @ LINEN STORAGE ROOMS.
22. ALL EXTERIOR HOLLOW METAL DOORS SHALL BE GALVANIZED & INSULATED.
23. ALL EXTERIOR DOORS SHALL BE PROVIDED W/ AN ALUMN. DRIP EDGE ANCHORED TO UNDERSIDE OF WALL CONSTRUCTION (DOORS AS PART OF AN ALUMN. STOREFRONT SYSTEM W/ A TRANSOM LITE DO NOT REQUIRE DRIP EDGE - NOR DO DOORS THAT ARE PROTECTED UNDER CANOPIES.
24. ALL EXTERIOR DOORS SHALL HAVE THE TOP OF THE DOOR SLAB CONSTRUCTED IN SUCH A WAY TO SHED & THEREFORE PREVENT WATER FROM COLLECTING/SITTING W/IN THE TOP OF THE DOOR SLAB. JOINTS SHALL BE MINIMIZED @ THE TOP OF DOOR SLAB, ANY CONSTRUCTION JOINTS SHALL BE FULLY WEATHER TIGHT.
25. GLAZING @ EXTERIOR DOORS & SIDELITES SHALL BE INSULATED TEMPERED LIGHTS.- REFER TO ELEVATIONS & WINDOW SCHEDULE(S) FOR GLASS COLOR & SPECS.
26. SIGNAGE SHALL BE INSTALLED ON THE WALL ADJACENT TO THE LATCH SIDE OF DOORS. TACTILE CHARACTERS ON SIGNS SHALL BE LOCATED 48" MIN AFF MEASURED FROM THE BASELINE OF THE LOWEST TACTILE CHARACTER AND 60" MAX AFF MEASURED FROM THE BASELINE OF THE HIGHEST CHARACTER.
27. REFER TO HOME 2 SUITES BY HILTON STANDARDS MANUAL FOR ADDITIONAL INFO REGARDING DOOR & DOOR HARDWARE REQ'S.
28. ALL DOOR HARDWARE SETS LISTED ARE RECOMMENDED ITEMS. REFER TO THE STANDARDS MANUAL FOR REQ'S.
29. ALL DOORS MUST HAVE A 32" MIN. CLEAR WIDTH OPENING WHEN DOOR IS FULLY OPEN.
30. THRESHOLDS @ ACCESSIBLE DOORS TO MEET ALL APPROPRIATE ACCESSIBILITY REQS. ACCESSIBLE DOORS INCLUDE ALL PUBLIC ACCESS SPACES, ALL PUBLIC EXTERIOR DOORS, ALL EGRESS DOORS, & EMPLOYEE DOORS THAT ARE INDICATED W/ A CLEAR FLOOR AREA.
31. EXTERIOR DOORS MUST HAVE WEATHER-STRIPPING W/ THE APPROPRIATE TYPE OF THRESHOLD.
32. OUT-SWINGING EXTERIOR METAL DOORS MUST HAVE CLOSED TOPS.
33. ALL ROOFTOP EXITS (DOORS & HATCHES) MUST BE EQUIPPED W/ A PANIC BAR OR OTHER RELEASING DEVICE, LATCHING HARDWARE, & ALARM THAT IS MONITORED IN THE SECURITY DISPATCH OFFICE OR PBX. THESE DOORS MUST HAVE A SIGN ON THE INSIDE FACE INDICATING THE DOOR IS ALARMED & TO BE USED IN EMERGENCY SITUATIONS ONLY, IF ACCESSIBLE TO THE PUBLIC.

HARDWARE SCHEDULE

Front Desk System
- Front Desk, Guest Cards,
- 2 Day Training

Set #1: Guestroom Entry Door
- 1.5 PR Hinges
- 1 Advance Card Lock
- 1 Door Closer - w/ 90° Stop
- 1 Perimeter Gasketing
- 1 Vinyl Threshold
- 1 Door Sweep
- 1 Privacy Latch 48" AFF
- 1 One Way Viewer
- (2) @ Accessible Rooms)

Set #2: NOT USED

Set #3: Connecting Doors
- 2 PR Spring Hinge
- 1 PR Hinges
- 2 Connecting Latch
- 2 Conn. DR Deadbolt
- 2 Perimeter Gasketing
- 1 Vinyl Threshold
- 2 Door Sweeps
- 2 Door Guard w/ Privacy Latch to Match Entry Door 48" AFF
- 2 Overhead Stop

Set #4: Bedroom Door
- 1.5 PR Hinges
- 1 Privacy Set
- 1 Wall Stop

Set #5: Bathroom Swing Door
- 1.5 PR Hinges
- 1 Privacy Set
- 1 Heavy duty hinge stop

Set #6: Boardroom
- 1.5 PR Hinges
- 1 Card Reader
- 1 Door Closer
- 1 Door Stop
- 1 Gasket
- 1 Door Sweep
- 2 1-Way Viewers

Set #7: Aluminum Exercise Room
- 1 Advance Card Lock
- 1 Continuous Hinge
- 1 Door Closer

Set #8: Exterior Aluminum Vestibule Automatic Sliding Doors
- All hardware by door supplier

Set #9: Aluminum Pool Lobby
- 1 Remote Reader
- 1 Continuous Hinges
- 1 Panic Devices
- 1 Push/Pulls
- 1 Door Closers

Set #10: Interior Aluminum Vestibule Automatic Sliding Doors
- All Hardware By Door Supplier
- 1 remote Reader (Inside Vestibule)
- 1 Intercom/Buzzer (Inside Vestibule)

Set #11:
- 1.5 PR Hinges
- 1 Store Room Lock
- 1 Door Closer
- 1 Weatherstrip
- 1 Threshold
- 1 Door Sweep
- 1 Rain Drip

Set #12: Exterior Aluminum Egress Door
- 1 Remote Reader
- 1 Rim Panic Interface
- 1 Continuous Hinges
- 1 Panic Devices
- 1 Push/Pulls
- 1 Door Closers
- 1 Threshold
- 1 Door Sweeps
- 1 Weatherstrip

Set #13:
- 3 PR Hinges
- 1 Store Room Lock
- 2 Flush Bolt
- 2 Door Closer
- 1 Weatherstrip

Set #14:
- 1.5 PR Hinges
- 1 Store Room Lock
- 1 Door Closer
- 1 Weatherstrip
- 1 Wall Stop

Set #15:
- 1.5 PR Hinges
- 1 Rim Exit Device (if required by code)
- 1 Door Closer
- 1 Weatherstrip
- 1 Wall Stop

Set #16:
- 1.5 PR Hinges
- 1 Rim Panic Interface
- 1 Rim Exit Device
- 1 Door Closer
- 1 Weatherstrip
- 1 Threshold
- 1 Door Sweep
- 1 Rain Drip Cap

Set #17:
- 1.5 PR Hinges
- 1 Advance Cardlock - Wing Lever
- 1 Door Closer
- 1 Weatherstrip
- 1 Wall Stop

Set #18:
- 1.5 PR Hinges
- 1 Office Lock
- 1 Wall Stop
- 1 Access Control

Set #19:
- 2 PR Hinges
- 1 Advance Cardlock - Wing Lever
- 1 Door Closer
- 1 Weatherstrip
- 1 Wall Stop
- 1 Kick Plate

Set #20:
- 1.5 PR Hinges
- 1 Advance Cardlock - Wing Lever
- 1 Door Closer
- 1 Weatherstrip
- 1 Wall Stop
- 1 One Way Viewer

Set #21:
- 1.5 PR Hinges
- 1 Privacy Set
- 1 Weatherstrip
- 1 Wall Stop
- 1 Kick Plate
- 1 Door Closer
- 1 Gasket

Set #22:
- 1.5 PR Hinges
- 1 Store Room Lock
- 1 Wall Stop

Set #23:
- 1.5 PR Hinges
- 1 Advance Cardlock - Wing Lever w/ Weather Pack
- 1 Door Closer
- 1 Weatherstrip
- 1 Threshold
- 1 Door Sweep
- 1 Rain Drip

Set #24:
- 2 PR HVY WT Hinges
- 1 Advance Cardlock - Wing LEVER
- 1 Door Closer
- 1 Weatherstrip
- 1 Wall Stop

Door Schedule "REMARKS"

A). PROVIDE (2) DOORS FOR EACH COMMUNICATING DOOR LOCATION

B). SLIDING AUTOMATIC ENTRANCE: BASIS OF DESIGN IS BESAM UNISLIDE OC-S, NARROW STILE SINGLE SLIDE DOOR SYSTEM

C). ALUMINUM DOOR WITHIN STOREFRONT FRAME BASIS OF DESIGN IS KAWNEER 500 WIDE STILE DOORS. DOORS & FRAMES TO BE PAINTED, ALL HARDWARE & TRIM TO BE CLEAR ANODIZED ALUMINUM OR US32D. REFER TO ELEVATIONS.

D). DOORS ON MAGNETIC HOLD OPENS TO TIED INTO FIRE ALARM SYSTEM AND TO RELEASE WHEN ALARM IS ACTUATED

E). POCKET DOOR KIT - BASIS OF DESIGN IS JOHNSON DOOR KIT MODEL 2000

F). OPERATING HARDWARE SHALL BE EXPOSED AND USABLE FROM BOTH SIDES WHEN SLIDING DOOR IS IN THE FULLY OPEN POSITION.

G). PROVIDE (1) REMOTE READER AND (1) INTERCOM/BUZZER-REFER TO HARDWARE SET #10/A7.01 FOR MANUFACTURER AND MODEL

H). SLIDING POCKET DOORS MUST HAVE A CLEAR OPENING WIDTH OF 32" WHEN FULLY OPEN - HARDWARE MAY NOT PROTRUDE INTO CLEAR OPENING

FRAME TYPES

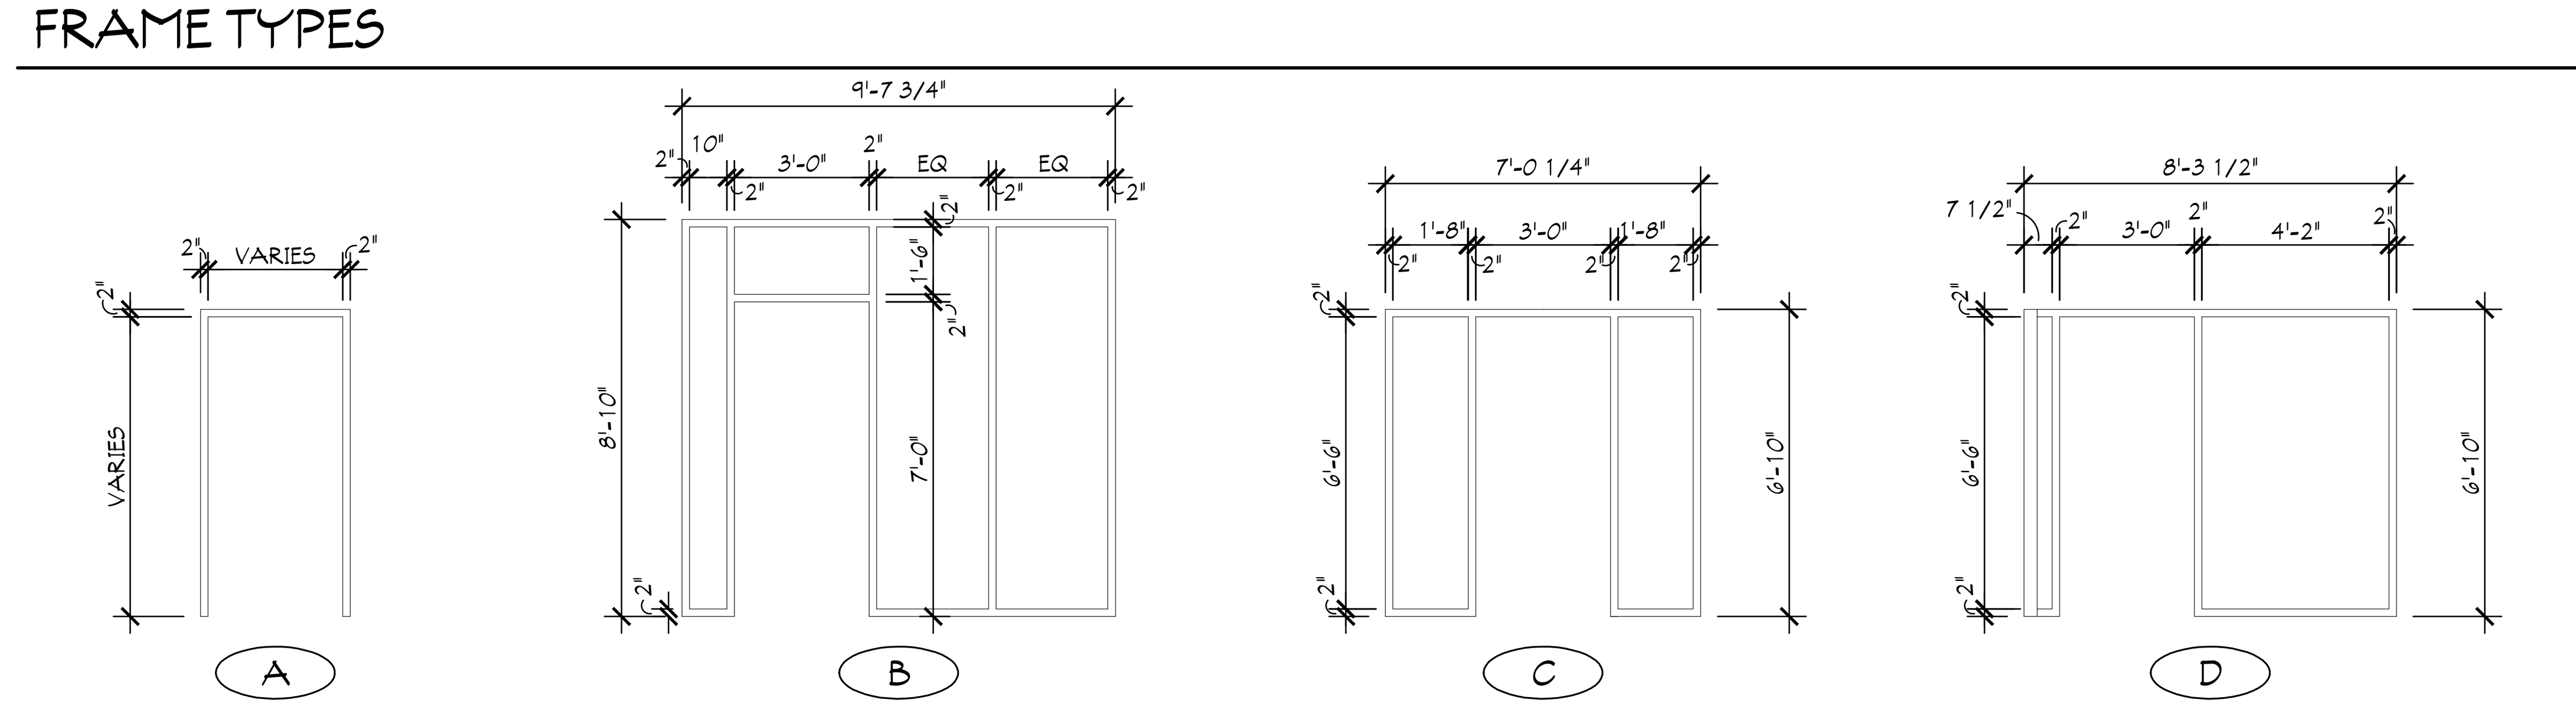

DOOR TYPES

GLAZING IN ALL FIXED AND OPERABLE PANELS OF SWINGING, SLIDING AND BIFOLD DOORS MUST BE TEMPERED.

ALL GLAZING ADJACENT TO AND WITHIN 24 INCHES OF DOORS AND WITHIN 60 INCHES OF FLOOR MUST BE TEMPERED.

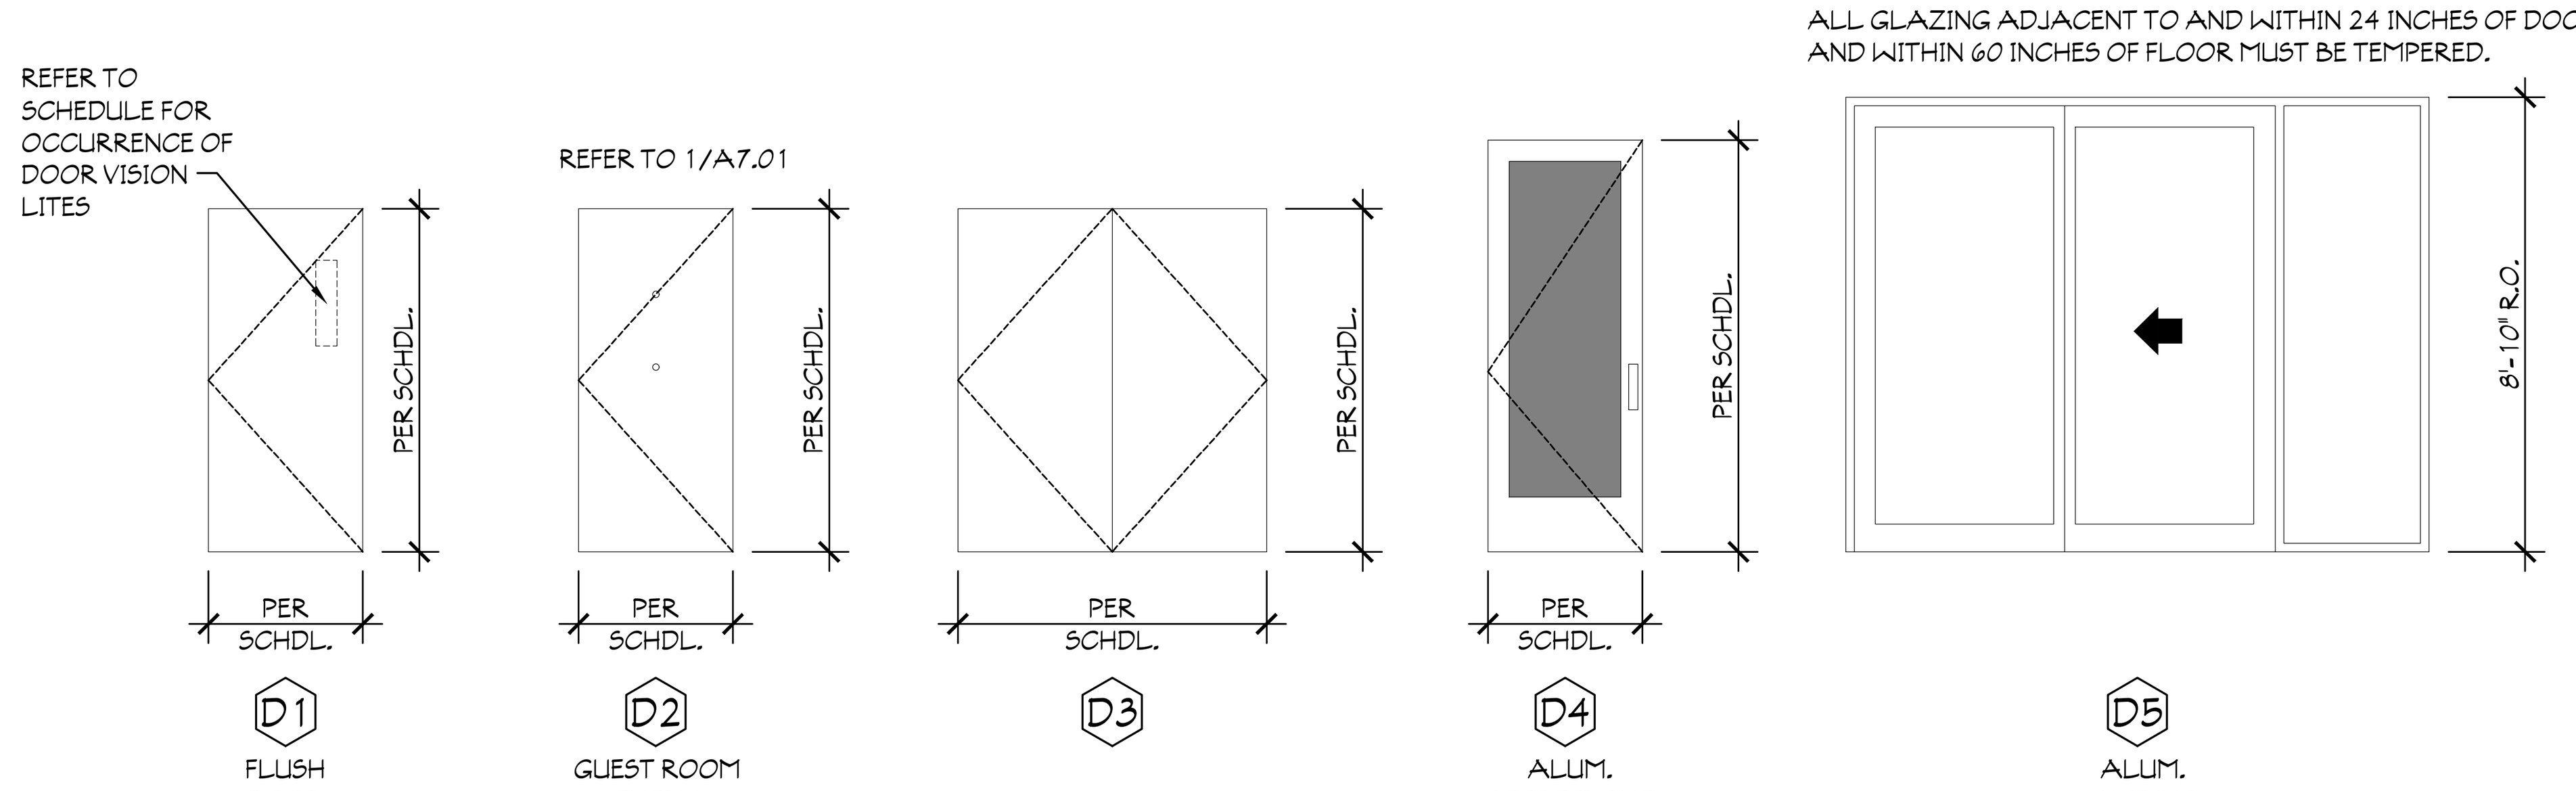

NOTE:

VERIFY ALL DIMENSIONS WITH MANUFACTURER/ INDUSTRY STANDARDS/ APPLICABLE CODES.

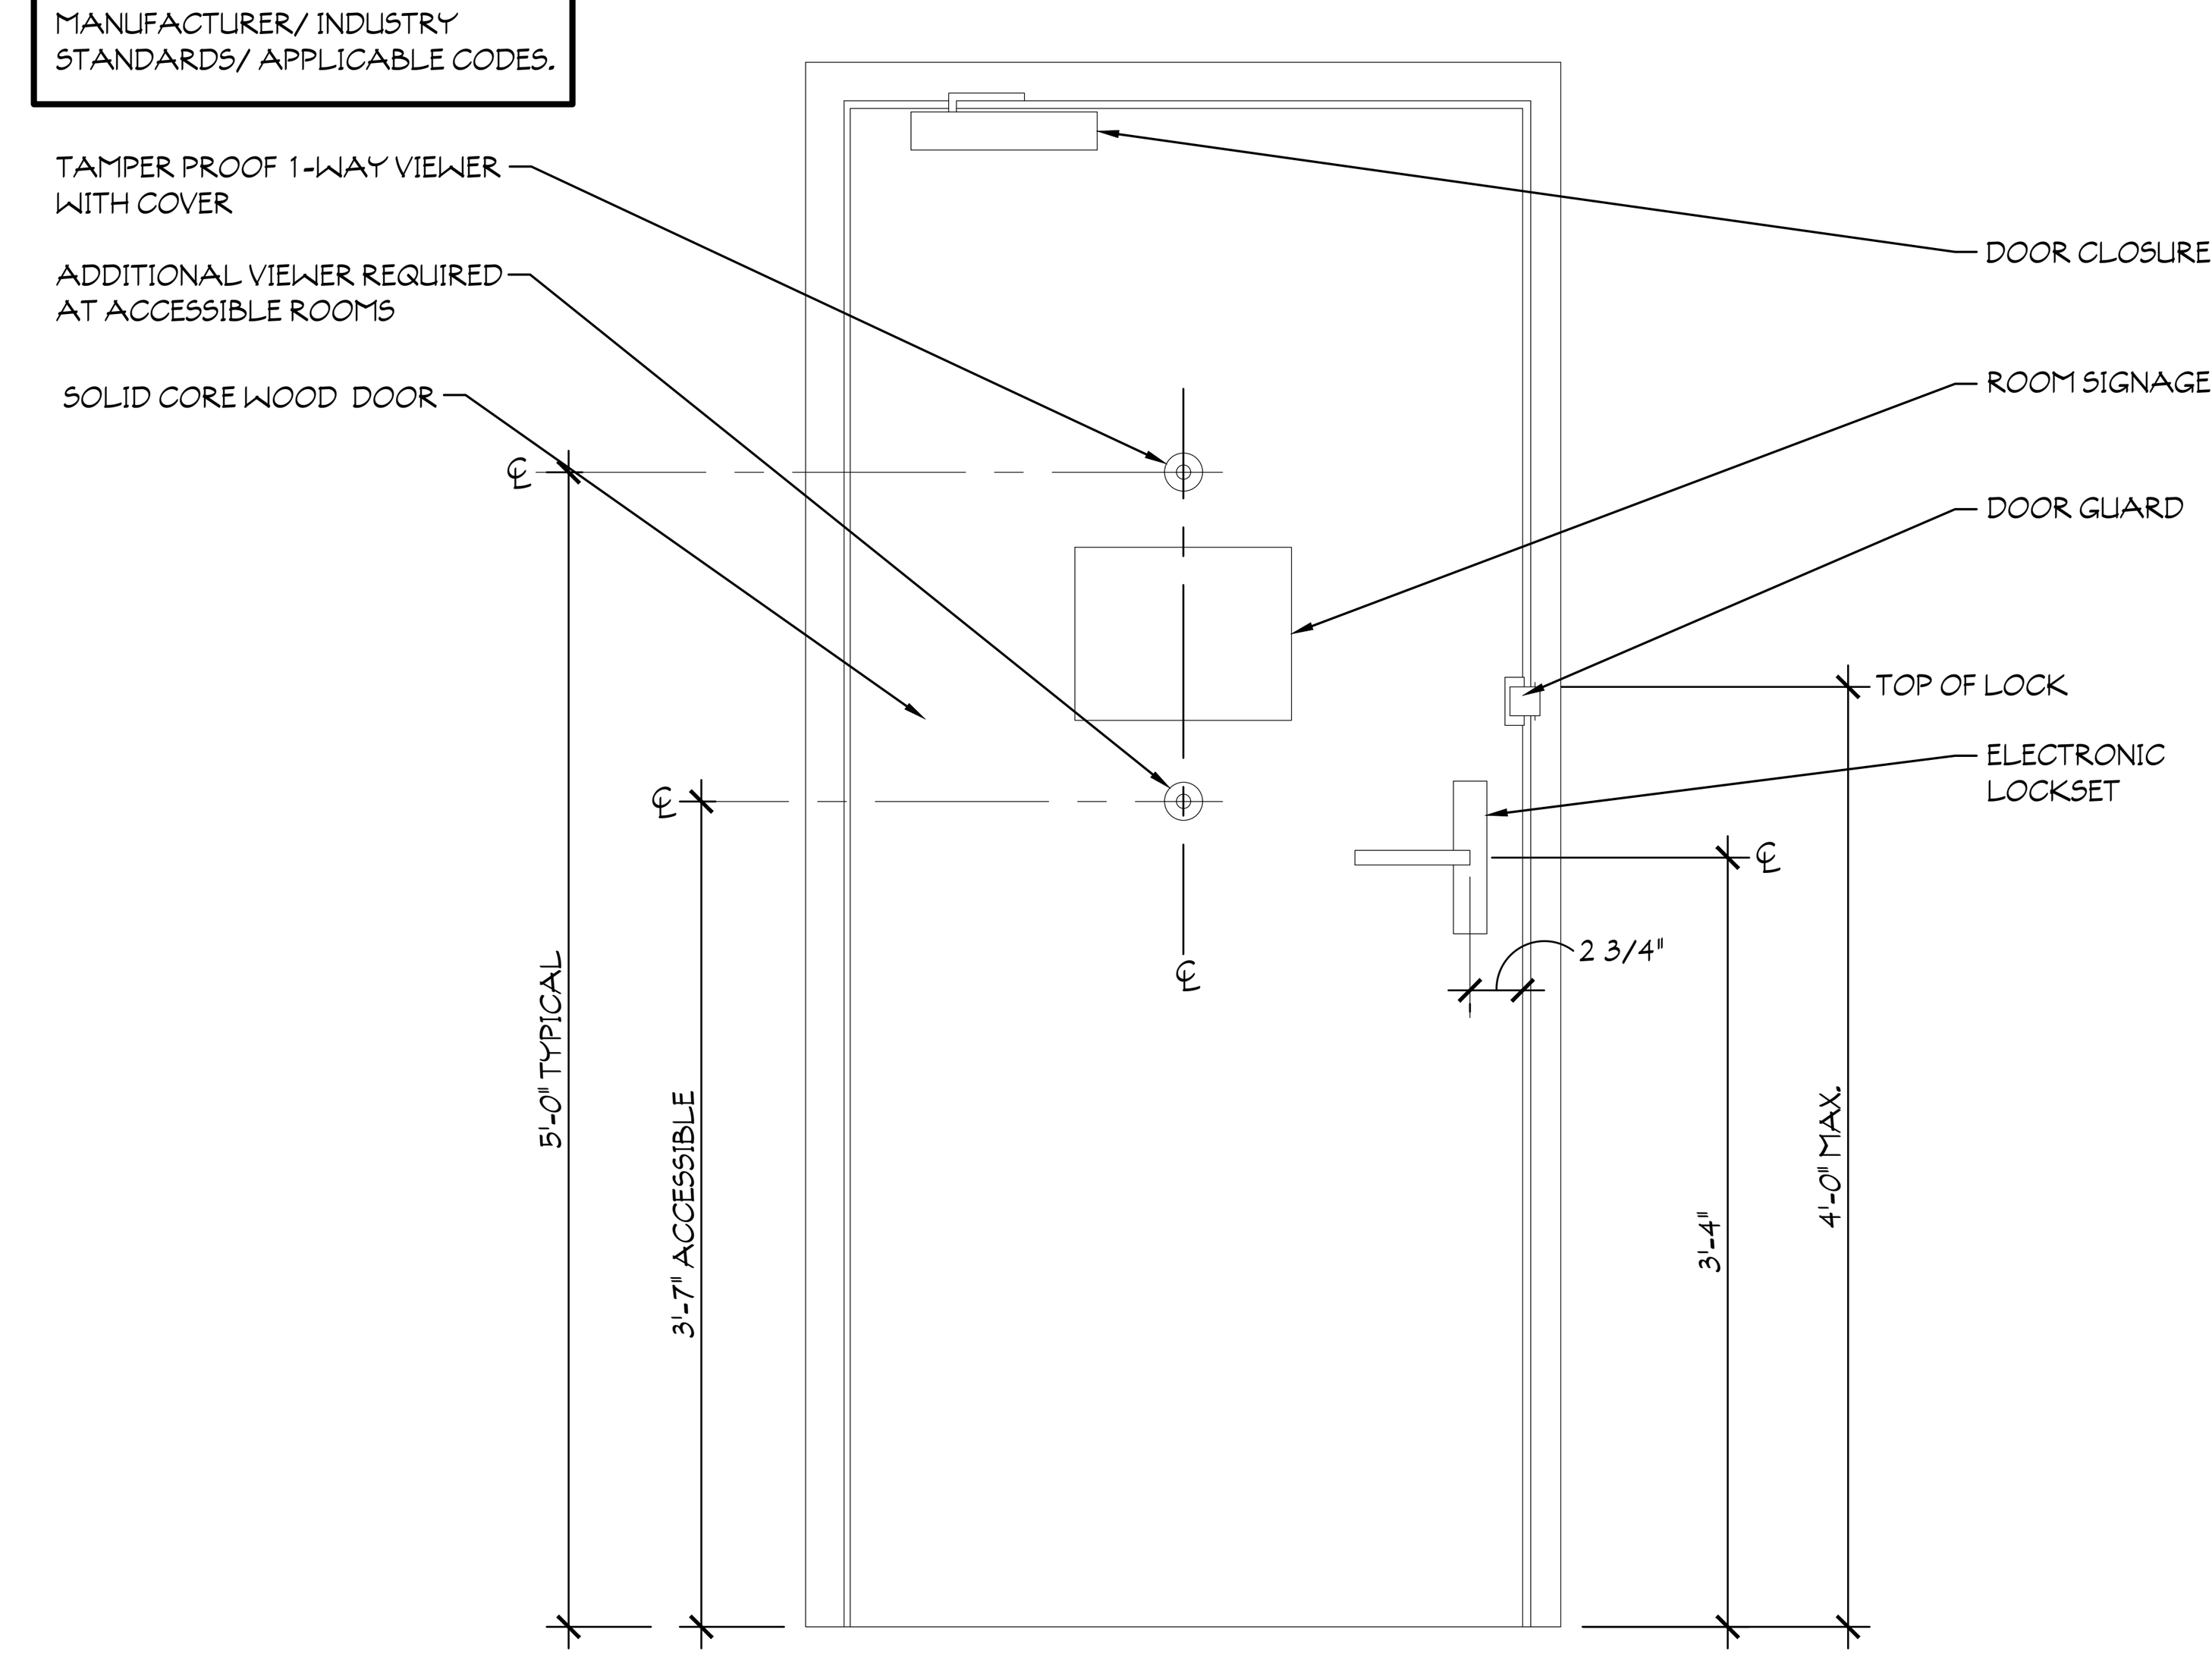

1 ELEVATION AT GUESTROOM ENTRY DOOR
SCALE: 1" = 1'-0"

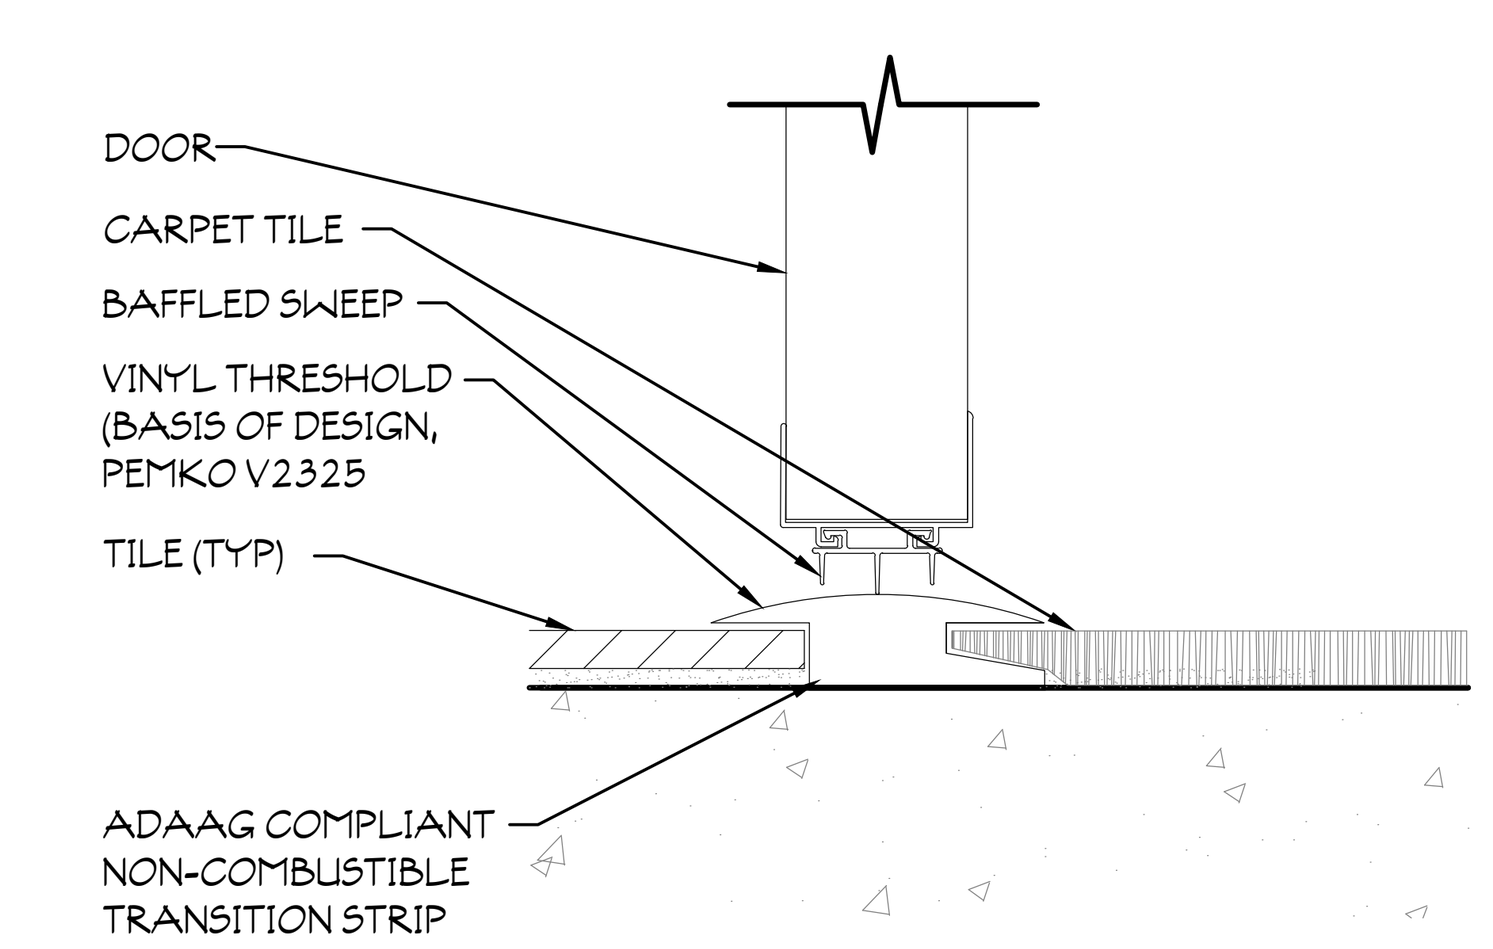

3 THRESHOLD DETAIL
SCALE: NOT TO SCALE @ GUESTROOM ENTRY DOOR

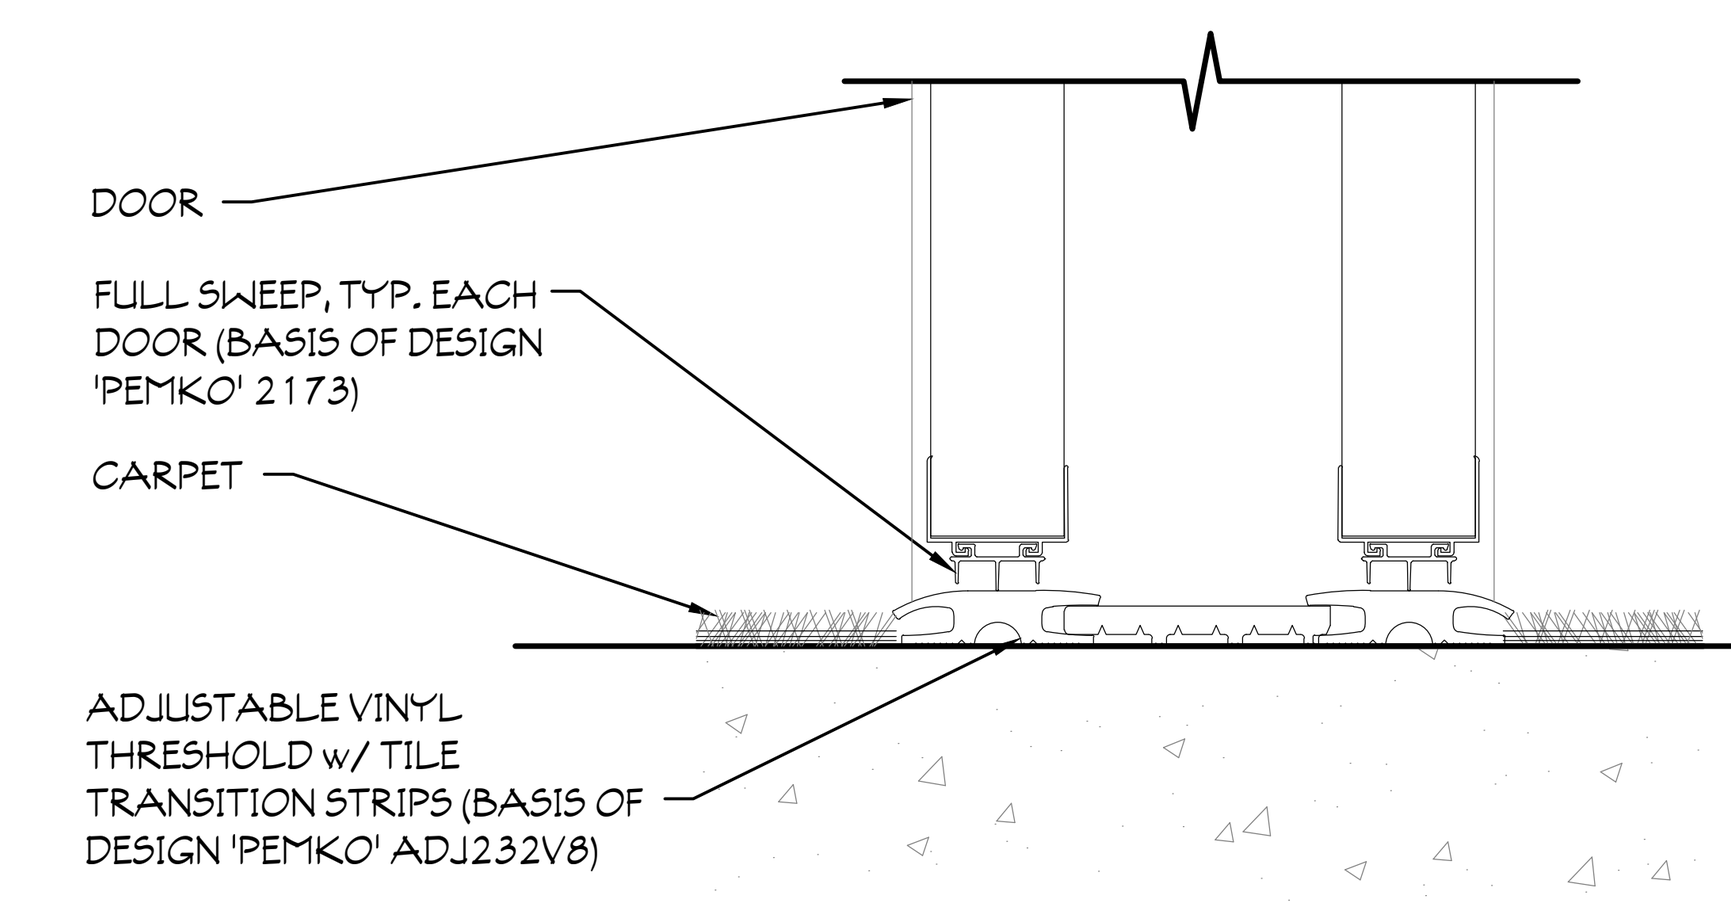

2 THRESHOLD DETAIL
SCALE: NOT TO SCALE @ CONNECTING DOOR

HOME 2 SUITES BY HILTON

SHEET SIZE 24x36

FT. WAYNE, INDIANA

REVISIONS:

PRELIMINARY - NOT FOR CONSTRUCTION

DATE: 05/01/26

JOB NO.: MAS-26-105

NAME: DOOR SCHEDULE

SHEET: A701