


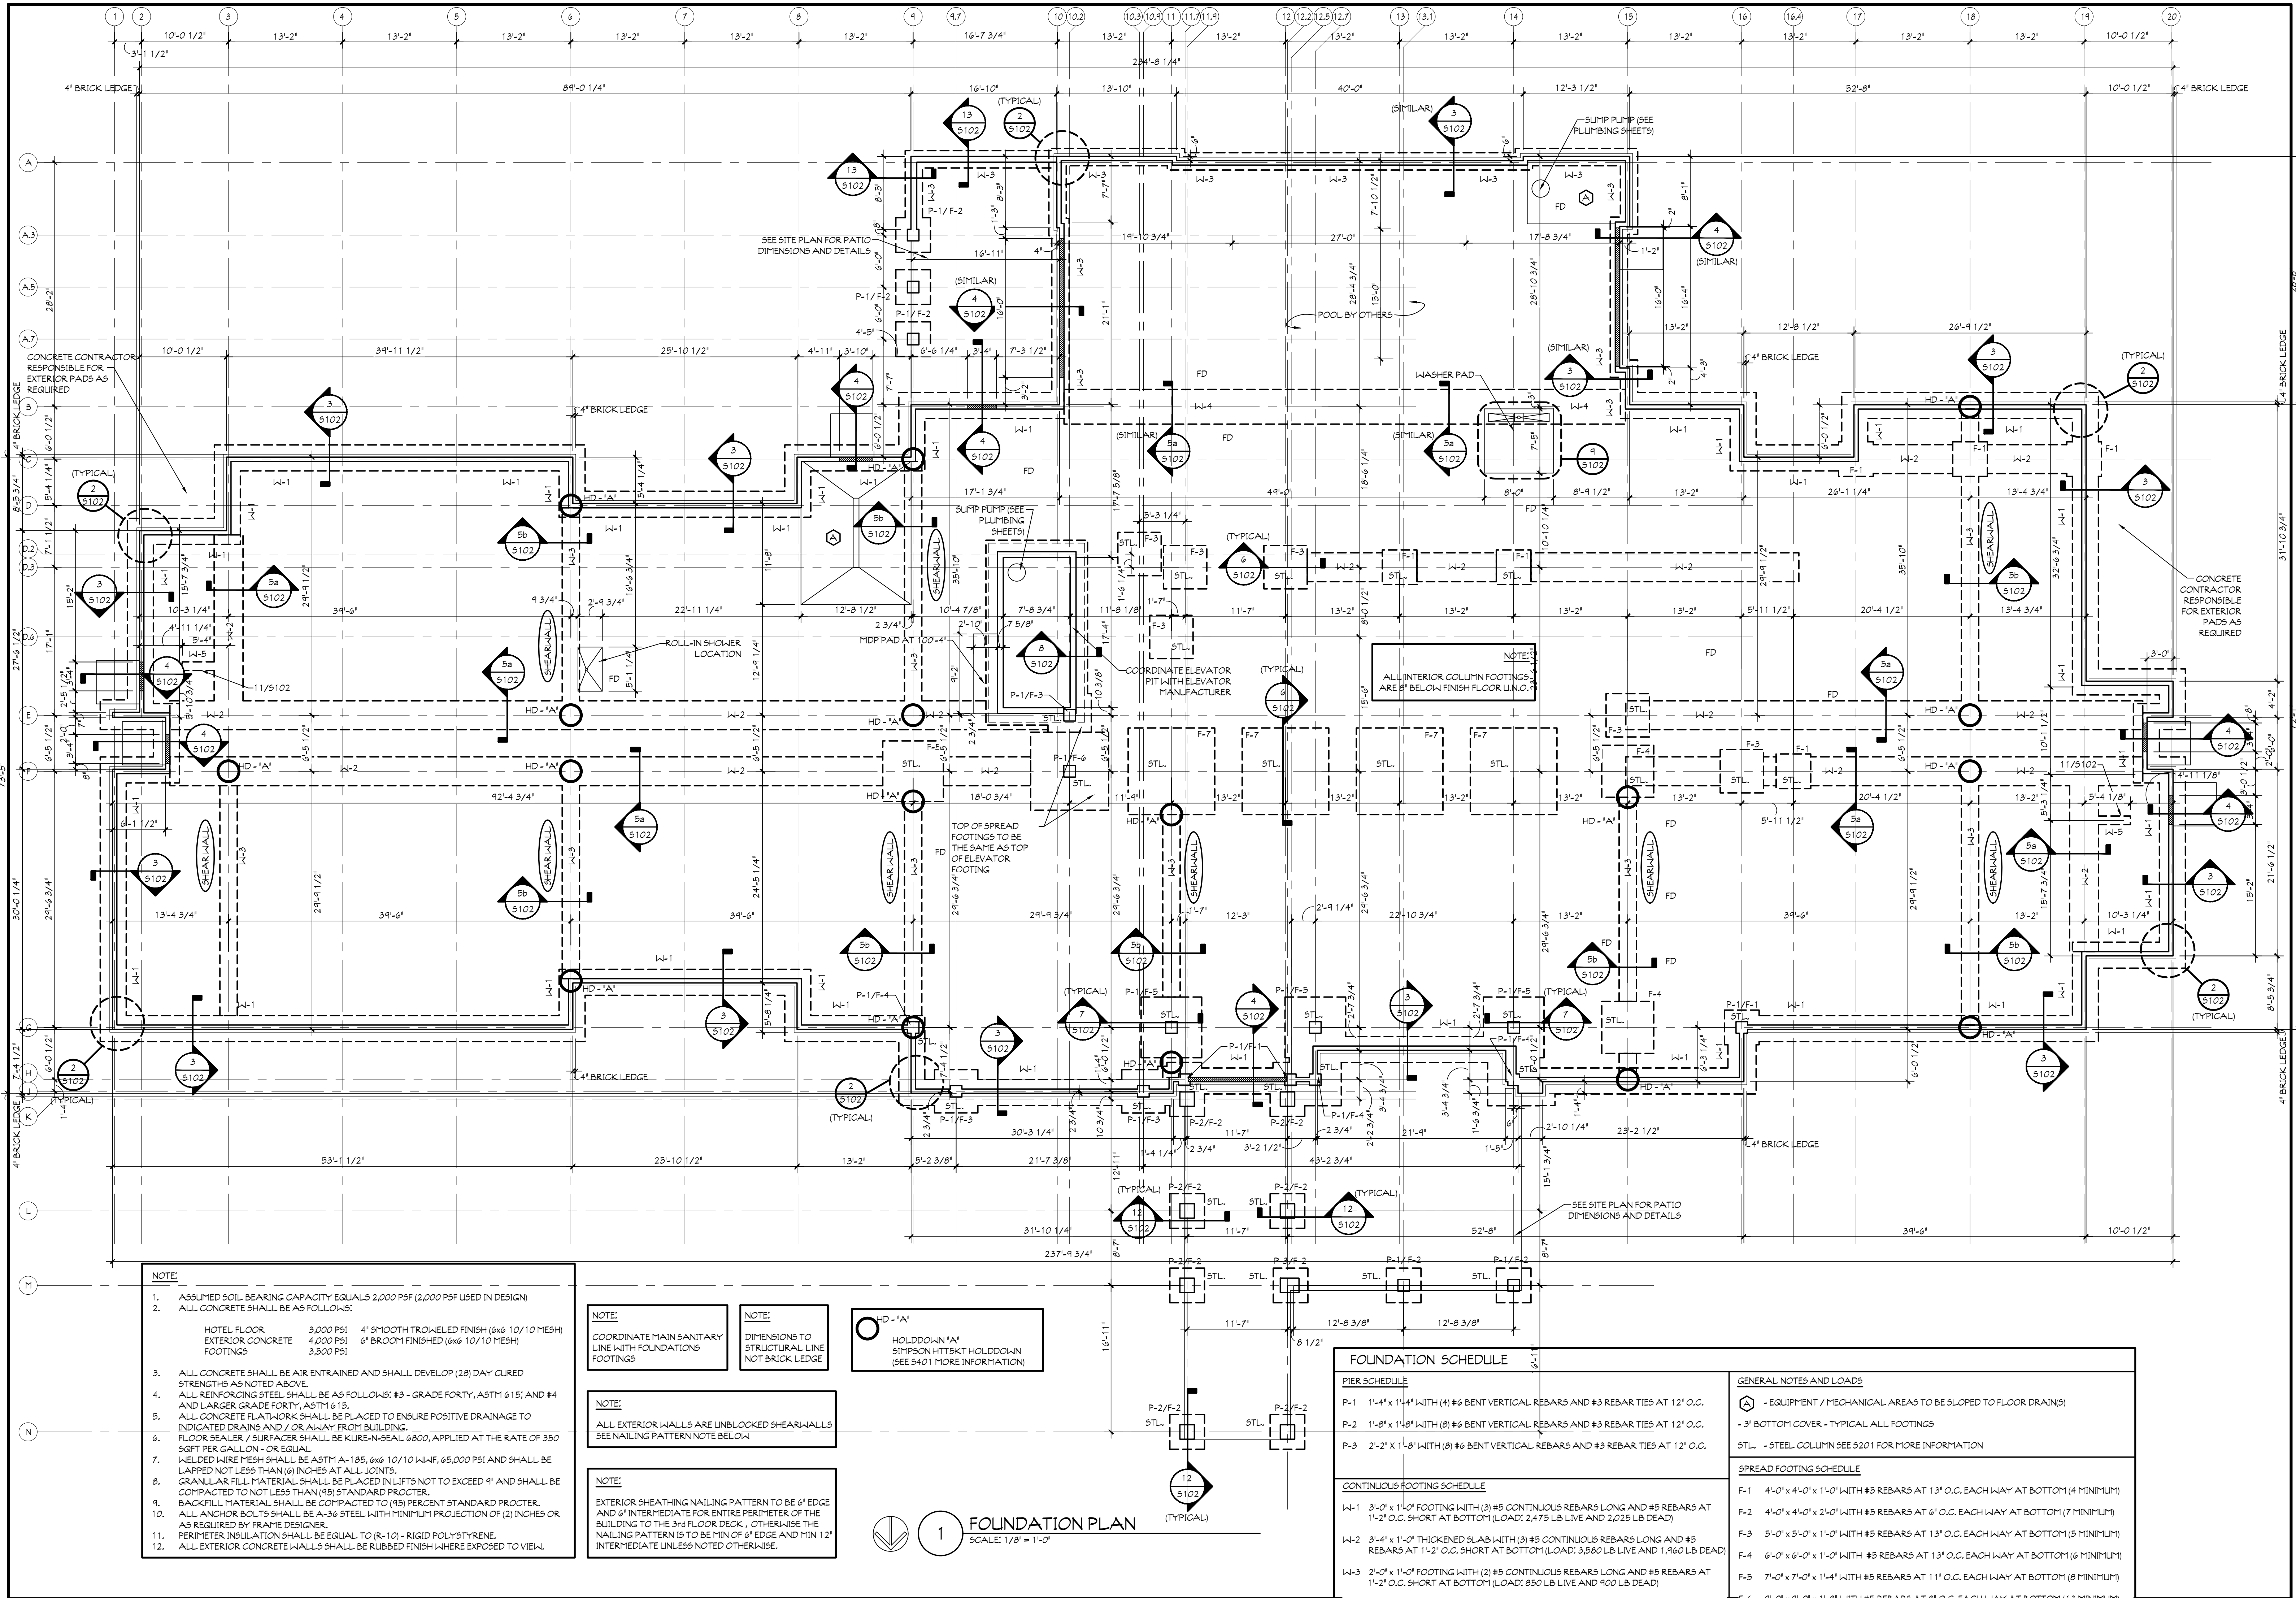

- NOTE:
1. ASSUMED SOIL BEARING CAPACITY EQUALS 2,000 PSF (2,000 PSF USED IN DESIGN)
 2. ALL CONCRETE SHALL BE AS FOLLOWS:
HOTEL FLOOR 3,000 PSI
EXTERIOR CONCRETE 4,000 PSI
FOOTINGS 3,500 PSI
 3. ALL CONCRETE SHALL BE AIR ENTRAINED AND SHALL DEVELOP (28) DAY CURED STRENGTHS AS NOTED ABOVE.
 4. ALL REINFORCING STEEL SHALL BE AS FOLLOWS: #3 - GRADE FORTY, ASTM 615; AND #4 AND LARGER GRADE FORTY, ASTM 615.
 5. ALL CONCRETE FLATWORK SHALL BE PLACED TO ENSURE POSITIVE DRAINAGE TO INDICATED DRAINS AND / OR AWAY FROM BUILDING.
 6. FLOOR SEALER / SURFACER SHALL BE KURE-N-SEAL 6800, APPLIED AT THE RATE OF 350 SQFT PER GALLON - OR EQUAL.
 7. WELDED WIRE MESH SHALL BE ASTM A-185, 6x6 10/10 W/JF, 65,000 PSI AND SHALL BE LAPPED NOT LESS THAN (6) INCHES AT ALL JOINTS.
 8. GRANULAR FILL MATERIAL SHALL BE PLACED IN LIFTS NOT TO EXCEED 4" AND SHALL BE COMPACTED TO NOT LESS THAN (95) STANDARD PROCTOR.
 9. BACKFILL MATERIAL SHALL BE COMPACTED TO (15) PERCENT STANDARD PROCTOR.
 10. ALL ANCHOR BOLTS SHALL BE A-36 STEEL WITH MINIMUM PROJECTION OF (2) INCHES OR AS REQUIRED BY FRAME DESIGNER.
 11. PERIMETER INSULATION SHALL BE EQUAL TO (R-10) - RIGID POLYSTYRENE.
 12. ALL EXTERIOR CONCRETE WALLS SHALL BE RUBBED FINISH WHERE EXPOSED TO VIEW.

- NOTE:
- COORDINATE MAIN SANITARY LINE WITH FOUNDATIONS FOOTINGS
- NOTE:
- ALL EXTERIOR WALLS ARE UNBLOCKED SHEAR WALLS SEE NAILING PATTERN NOTE BELOW
- NOTE:
- EXTERIOR SHEATHING NAILING PATTERN TO BE 6" EDGE AND 6" INTERMEDIATE FOR ENTIRE PERIMETER OF THE BUILDING TO THE 3rd FLOOR DECK, OTHERWISE THE NAILING PATTERN IS TO BE MIN OF 6" EDGE AND MIN 12" INTERMEDIATE UNLESS NOTED OTHERWISE.

NOTE:

COORDINATE MAIN SANITARY LINE WITH FOUNDATIONS FOOTINGS

NOTE:

DIMENSIONS TO STRUCTURAL LINE NOT BRICK LEDGE

NOTE:

HD - "A" HOLDDOWN "A" SIMPSON HTTSKT HOLDDOWN (SEE S401 MORE INFORMATION)

1 FOUNDATION PLAN
SCALE: 1/8" = 1'-0"

FOUNDATION SCHEDULE

- PIER SCHEDULE
- P-1 1'-4" x 1'-4" WITH (4) #6 BENT VERTICAL REBARS AND #3 REBAR TIES AT 12" O.C.
 - P-2 1'-8" x 1'-8" WITH (8) #6 BENT VERTICAL REBARS AND #3 REBAR TIES AT 12" O.C.
 - P-3 2'-2" x 1'-8" WITH (8) #6 BENT VERTICAL REBARS AND #3 REBAR TIES AT 12" O.C.
- CONTINUOUS FOOTING SCHEDULE
- W-1 3'-0" x 1'-0" FOOTING WITH (3) #5 CONTINUOUS REBARS LONG AND #5 REBARS AT 1'-2" O.C. SHORT AT BOTTOM (LOAD: 2,475 LB LIVE AND 2,025 LB DEAD)
 - W-2 3'-4" x 1'-0" THICKENED SLAB WITH (3) #5 CONTINUOUS REBARS LONG AND #5 REBARS AT 1'-2" O.C. SHORT AT BOTTOM (LOAD: 3,580 LB LIVE AND 1,960 LB DEAD)
 - W-3 2'-0" x 1'-0" FOOTING WITH (2) #5 CONTINUOUS REBARS LONG AND #5 REBARS AT 1'-2" O.C. SHORT AT BOTTOM (LOAD: 850 LB LIVE AND 900 LB DEAD)

- GENERAL NOTES AND LOADS
- EQUIPMENT / MECHANICAL AREAS TO BE SLOPED TO FLOOR DRAIN(S)
 - 3" BOTTOM COVER - TYPICAL ALL FOOTINGS
 - STEEL COLUMN SEE S201 FOR MORE INFORMATION
- SPREAD FOOTING SCHEDULE
- F-1 4'-0" x 4'-0" x 1'-0" WITH #5 REBARS AT 13" O.C. EACH WAY AT BOTTOM (4 MINIMUM)
 - F-2 4'-0" x 4'-0" x 2'-0" WITH #5 REBARS AT 6" O.C. EACH WAY AT BOTTOM (7 MINIMUM)
 - F-3 5'-0" x 5'-0" x 1'-0" WITH #5 REBARS AT 13" O.C. EACH WAY AT BOTTOM (5 MINIMUM)
 - F-4 6'-0" x 6'-0" x 1'-0" WITH #5 REBARS AT 13" O.C. EACH WAY AT BOTTOM (6 MINIMUM)
 - F-5 7'-0" x 7'-0" x 1'-4" WITH #5 REBARS AT 11" O.C. EACH WAY AT BOTTOM (8 MINIMUM)
 - F-6 9'-0" x 9'-0" x 1'-8" WITH #5 REBARS AT 8" O.C. EACH WAY AT BOTTOM (13 MINIMUM)

GENERAL NOTES

ALTHOUGH DRAWINGS ARE DRAWN TO SCALE, THE ACCURACY OF THE DRAWINGS CANNOT BE GUARANTEED. DIMENSIONS SHOWN ON THE DRAWINGS SHALL BE USED FOR CONSTRUCTION. DIMENSIONS SHOWN ON THE DRAWINGS SHALL BE USED FOR CONSTRUCTION.

Architects
Planners
Engineers
Construction Mgmt.
MAUIST ARCHITECTURAL SERVICES
DIVISION OF L.E.M., INC.
112 NORTH MAIN STREET
GOSHEN, INDIANA 46526
PHONE: (574) 537-8500
FAX: (574) 537-0808

MAUIST ARCHITECTURAL SERVICES
DIVISION OF L.E.M., INC.
112 NORTH MAIN STREET
GOSHEN, INDIANA 46526
PHONE: (574) 537-8500
FAX: (574) 537-0808

HOME 2
SUITES BY HILTON

SHEET SIZE 24x36

FT. WAYNE, INDIANA

REVISIONS:

DATE: 05/01/26
JOB NO.: MAS-26-105
NAME: FOUNDATION PLAN
SHEET: S101

PRELIMINARY - NOT FOR CONSTRUCTION